




Phone: 9465 - 3441
Fax: 9465 - 9444
Email: adam@boatupholstery.com.au
Web: www.boatupholstery.com.au

Flat top Fitting Instructions

TOP VIEW

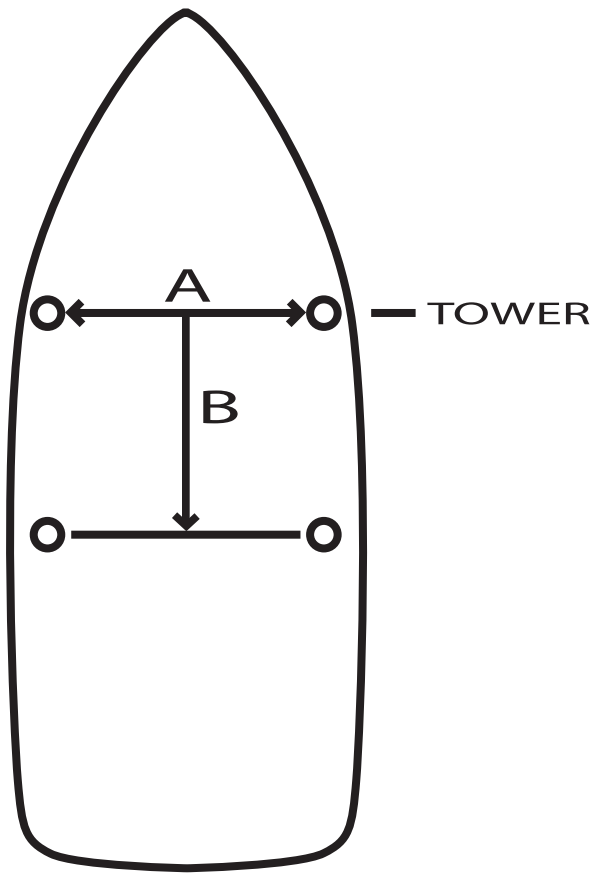

Once the tower is installed on the boat locate a position on the tower where the bimini top should mount to the front bar (Normally it's about 1m above the deck of the boat)

Once the height of the bimini top has been set, measure the distance between the two front bars from left to right (at the same height on both sides). (This is the width that your bimini top will be made.)
This is A.

Then all you have to do is add an overall length of the bimini top.
This is B.

The bimini will come with extra supports that will need to be trimmed to make the rear support bar hold the rear of the bimini top in place.

If you have any further questions please contact us on the above number.

Measure between the towers where the bimini top will mount.

A _____

Measure the length you want the bimini top to be.

B _____